


N 50, BUILT-UNDER DOUBLE OVEN J1ACE2HNOB



Built under double oven - twice as flexible, twice as fast - bake or roast multiple dishes at the same time.

- ✓ EasyClean - this special cleaning aid provides uncomplicated, energy-saving cleaning of the oven interior.
- ✓ LCD-Display - simple, straightforward with large characters for clear reading
- ✓ Cliprails - Place dishes exactly where you want them in your oven.
- ✓ CircoTherm® - Smart hot-air solution that lets you bake on up to three levels at once.

Features

Technical Data

Built-in / Free-standing: Built-in
Integrated Cleaning system: No
Dimensions: 717x594x550 mm
Dimensions of the packed product (HxWxD): . 790 x 660 x 690 mm
Control Panel Material: Glass
Door Material: Glass
Net weight: 47.3 kg
Usable volume of cavity: 47 l
Cooking method: Full width grill, Hotair gentle, Hot Air, Conventional heat, Pizza setting, Hot air grilling
Oven control: mechanical
EAN code: 4242004221982
Energy efficiency rating: A
Energy consumption per cycle conventional (2010/30/EC): 0.84 kWh/cycle
Energy consumption per cycle forced air convection (2010/30/EC): 0.71 kWh/cycle
Energy efficiency class (2010/30/EC) - cavity 2: B
Energy consumption per cycle conventional - cavity 2 (2010/30/EC): 0.83 kWh/cycle
Energy efficiency index (2010/30/EC): 94.7 %
Energy efficiency index cavity 2 (2010/30/EC): 120.3 %
Connection Rating: 5300 W
Fuse protection: 25 A
Voltage: 220-240 V
Frequency: 50 Hz
Plug type: no plug (electrical connection by electrician), fixed connection (electrical connection by electrician)
Included accessories: 2 x combination grid, 1 x universal pan



4 242004 221982

Included accessories

2 x combination grid, 1 x universal pan

Optional accessories

Z12CP10A0	Pizza pan, enamelled
Z12CU10A0	Multipurpose pan, enamelled
Z1365WX0	Wireless food thermometer
Z13CR10X0	Baking and roasting grid (steam)
Z11AB15A0	Baking tray, non-stick ceramic coated
Z11AU15A0	Universal pan, non-stick ceramic coated
Z11CR10X0	Baking and roasting grid (standard)
Z11GT10X3	Glass roasting dish, 5,4l
Z11TI15X0	Cliprails
Z12CB10A0	Baking tray, enamelled

N 50, BUILT-UNDER DOUBLE OVEN J1ACE2HNOB

Features

- LCD Display (White)

Features

- Control panel lock
- Interior halogen light
- Door hinge small cavity: bottom
- Cavity (inner surface) top: Enamel grey
- EasyClean
- Full glass inner door
- 1 Clip rail, Stop function
- Cavity (inner surface) bottom: enamel anthracite
- Door hinge big cavity: Drop down door

Top oven additional features

- Cavity volume: 34 Litre
- Oven with 4 heating methods: Top/bottom heat, Full surface grill, Small area grill, Bottom heat
- Temperature range 50 °C - 275 °C

Main oven additional features


- Cavity volume: 47 litre
- 2 x combination grid, 1 x universal pan

Performance/technical information

- Nominal voltage: 220 - 240 V
- Appliance dimension (hxxwxd): 717 mm x 594 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

*N 50, BUILT-UNDER DOUBLE OVEN
J1ACE2HNOB*

Dimensioned drawings

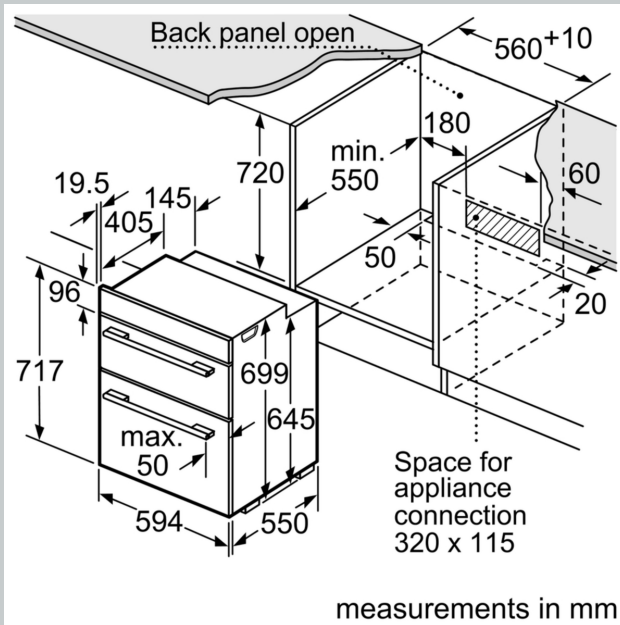


measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	39	40
Full-surface induction hob	49	50
Gas hob	29	40
Electric hob	29	32

measurements in mm
Installation with a hob



- A:** Recessed depth 29-50 mm.
See hob dimensional drawing.
B: Min. distance:
Induction hob: 5 mm
Gas hob: 5 mm
Electric hob: 2 mm

measurements in mm

